

OFR ME 1970-1

A Groundwater Report on the
Nova Scotia Department of Lands and Forests
Complex at Shubenacadie

By

PROPERTY OF
THE LIBRARY
DEPARTMENT OF LANDS & FORESTS
PROVINCE OF NOVA SCOTIA

Terry W. Hennigar, P. Eng.
Groundwater Geologist
Groundwater Section
N. S. Dept. of Mines

November 26, 1970

CONTENTS

	Page
ABSTRACT	1
INTRODUCTION	2
Location and population	2
Climate	4
Physiography and drainage	4
Water use	5
Previous work	5
Acknowledgments	6
GEOLOGY	6
Introduction	6
Bedrock deposits	6
Surficial deposits	8
HYDROLOGY	9
Introduction	9
Windsor aquifers	9
Surficial aquifers	9
WATER QUALITY	11
Windsor aquifers	11
Surficial aquifers	11
RECOMMENDATIONS AND CONCLUSIONS	13
REFERENCES CITED	14

TABLES

	Page
Table 1. Data on selected wells drilled in Shubenacadie	10

FIGURES

Figure 1. Location map, scale 1" = 4 miles	3
Figure 2. Surficial geology of the Shubenacadie area	7

APPENDICES

Appendix A. Graphic logs of selected wells drilled in the Shubenacadie area.	
Appendix B. Chemical analyses of samples from selected wells in the Shubenacadie area.	
Appendix C. Results of bacteriological examination of water samples from selected wells in the Shubenacadie area.	

ABSTRACT

Field exploration was mainly confined to the surficial deposits overlying the Windsor Group of sediments. It was found that the glaciofluvial and/or lacustrine deposits of sands in the area transmit an excellent quality of water to well points developed in these materials. Unfortunately a portion of these sand deposits has been used as a burial ground for animals by the wild life park which has resulted in a dense bacteriological contamination of these areas. Therefore unless the area that has already been contaminated can be located and outlined and the remaining deposits protected from further pollution it will be unsafe to construct new wells and develop this area as a water supply.

An examination of the water bearing characteristics of the surficial sand deposits, and the chemical analyses of water derived from these materials indicate that development of these shallow sands is the most practical course to follow in obtaining a water supply for the area.

Data collected during the survey also indicate the existence of a considerable depth of water bearing gravel near the west side of the complex. Although the water obtained from depths greater than 110 feet is reported to be unsuitable for use because of large amounts of dissolved mineral, it is highly possible that water bearing zones at depths to about 75 feet may contain a relatively minor amount of dissolved mineral matter.

INTRODUCTION

A brief groundwater survey was carried out in the Department of Lands and Forests complex at Shubenacadie to assess the possibility of obtaining a water supply for the three department sections in that area: 1. The Parks Division, 2. Wild Life Park, and 3. Fire Control Headquarters.

The survey attempted mainly to appraise the quality and quantity of water available in the surficial sand deposits. Also samples were collected from the three drilled wells in the Wild Life Park to determine the chemical quality and the possibility of using this generally considered "highly mineralized water" as an alternate source.

The primary need for a central water system is to provide the three sections of the Department of Lands and Forests an adequate supply of good quality water preferably from a common source and through a common distribution system.

Location and Population

The Department of Lands and Forests complex is located in the southern part of Colchester County on the Halifax to Truro Highway about 20 miles south of Truro (see Location Map, scale 1 inch equals 4 miles, Figure 1). Another map (Fig. 2, page 7) scale 4 inches equals one mile, outlines the surficial geology of that area. This area is included in the west central portion of the Shubenacadie map sheet 11 E 3.

Because of the multiple and various activities, many of which are seasonal, within the complex it is difficult to accurately determine the population to be serviced with a domestic water system. However, an estimate of about 40 persons



e.b

SCALE: 1" = 4 MILES

FIGURE 1 LOCATION MAP OF AREA

during the winter months and a total of about 300 persons during the summer picnic and camping season may be an accurate enough estimate for our purposes. Over and above this figure there is an animal population of several hundreds which also depends on a constant supply of water.

Climate

The mean annual precipitation is 41.8 inches at Upper Stewiacke, based on 30 years of records, with 36.2 inches as rainfall. Of the total 16.8 inches or about 41% of this occurs during the months of May to September inclusive.

Physiography and Drainage

The Shubenacadie area is in the south portion of the Central Lowlands of Nova Scotia and is bounded on the south by the Atlantic uplands.

Land elevations in the map area vary from less than 50 feet along the Shubenacadie River to over 150 feet above sea level in the north part of the area.

The two principle water courses in the area, the Shubenacadie River and St. Andrews River, form the west and the east boundaries respectively. The former, which is tidal in this area, flows north while the latter flows southward draining the area north and east of the map area.

A third unnamed drainage system originates at a sinkhole (Karst hole) about .5 mile north of the center of the area. The stream flows south, parallel to the other two streams, and through the wild life park where it is utilized as a sanctuary for waterfowl.

Water Use

At present the water supply for the area is obtained from three different sources. The wild life park has three drilled bedrock wells which reportedly supply an inadequate volume of water containing a large amount of total dissolved solids. The Fire Control Headquarters obtain its domestic supply from a large well-cistern type of a structure which requires additions of water by a water truck on a weekly basis during most summer periods. The Parks Division, as yet, do not have a water supply for the picnic-camping complex which is currently nearing completion.

An estimate of total water consumption within the complex is at best a very crude estimate because of the diversified uses and the effect seasonal activity has on daily consumption. However, assuming a maximum number of 300 consumers and allowing a consumption of 50 gallons per day (igpd) per consumer, it is estimated that about 15,000 imperial gallons per day (about 10 imperial gallons per minute, igpm), would be required during peak summer activity. It must be born in mind that the majority of these consumers at peak demand will be in the picnic and camping area where a limited number of cold water taps will be available to supply water for washing, cooking and drinking. On the basis of these considerations it is felt that a supply of 10 igpm on a continuous basis will be more than adequate.

Previous Work

The bedrock geology of the Shubenacadie area has been mapped by I. M. Stevenson in 1959 on a scale of one inch equals one mile. This map shows and contains notes on general geological structure, the lithology and economic geology of the area. Owen L. Hughes mapped the surficial geology of the area in 1957.

A complete soil survey was carried out in the area in 1948 by the Dominion Department of Agriculture.

Acknowledgments

The Groundwater Section, Geological Division, Nova Scotia Department of Mines, would like to acknowledge the co-operation of employees of the Dept. of Lands and Forests in the area and residents of that area for supplying information and assisting in collecting data required for compiling this report.

GEOLOGY

Introduction

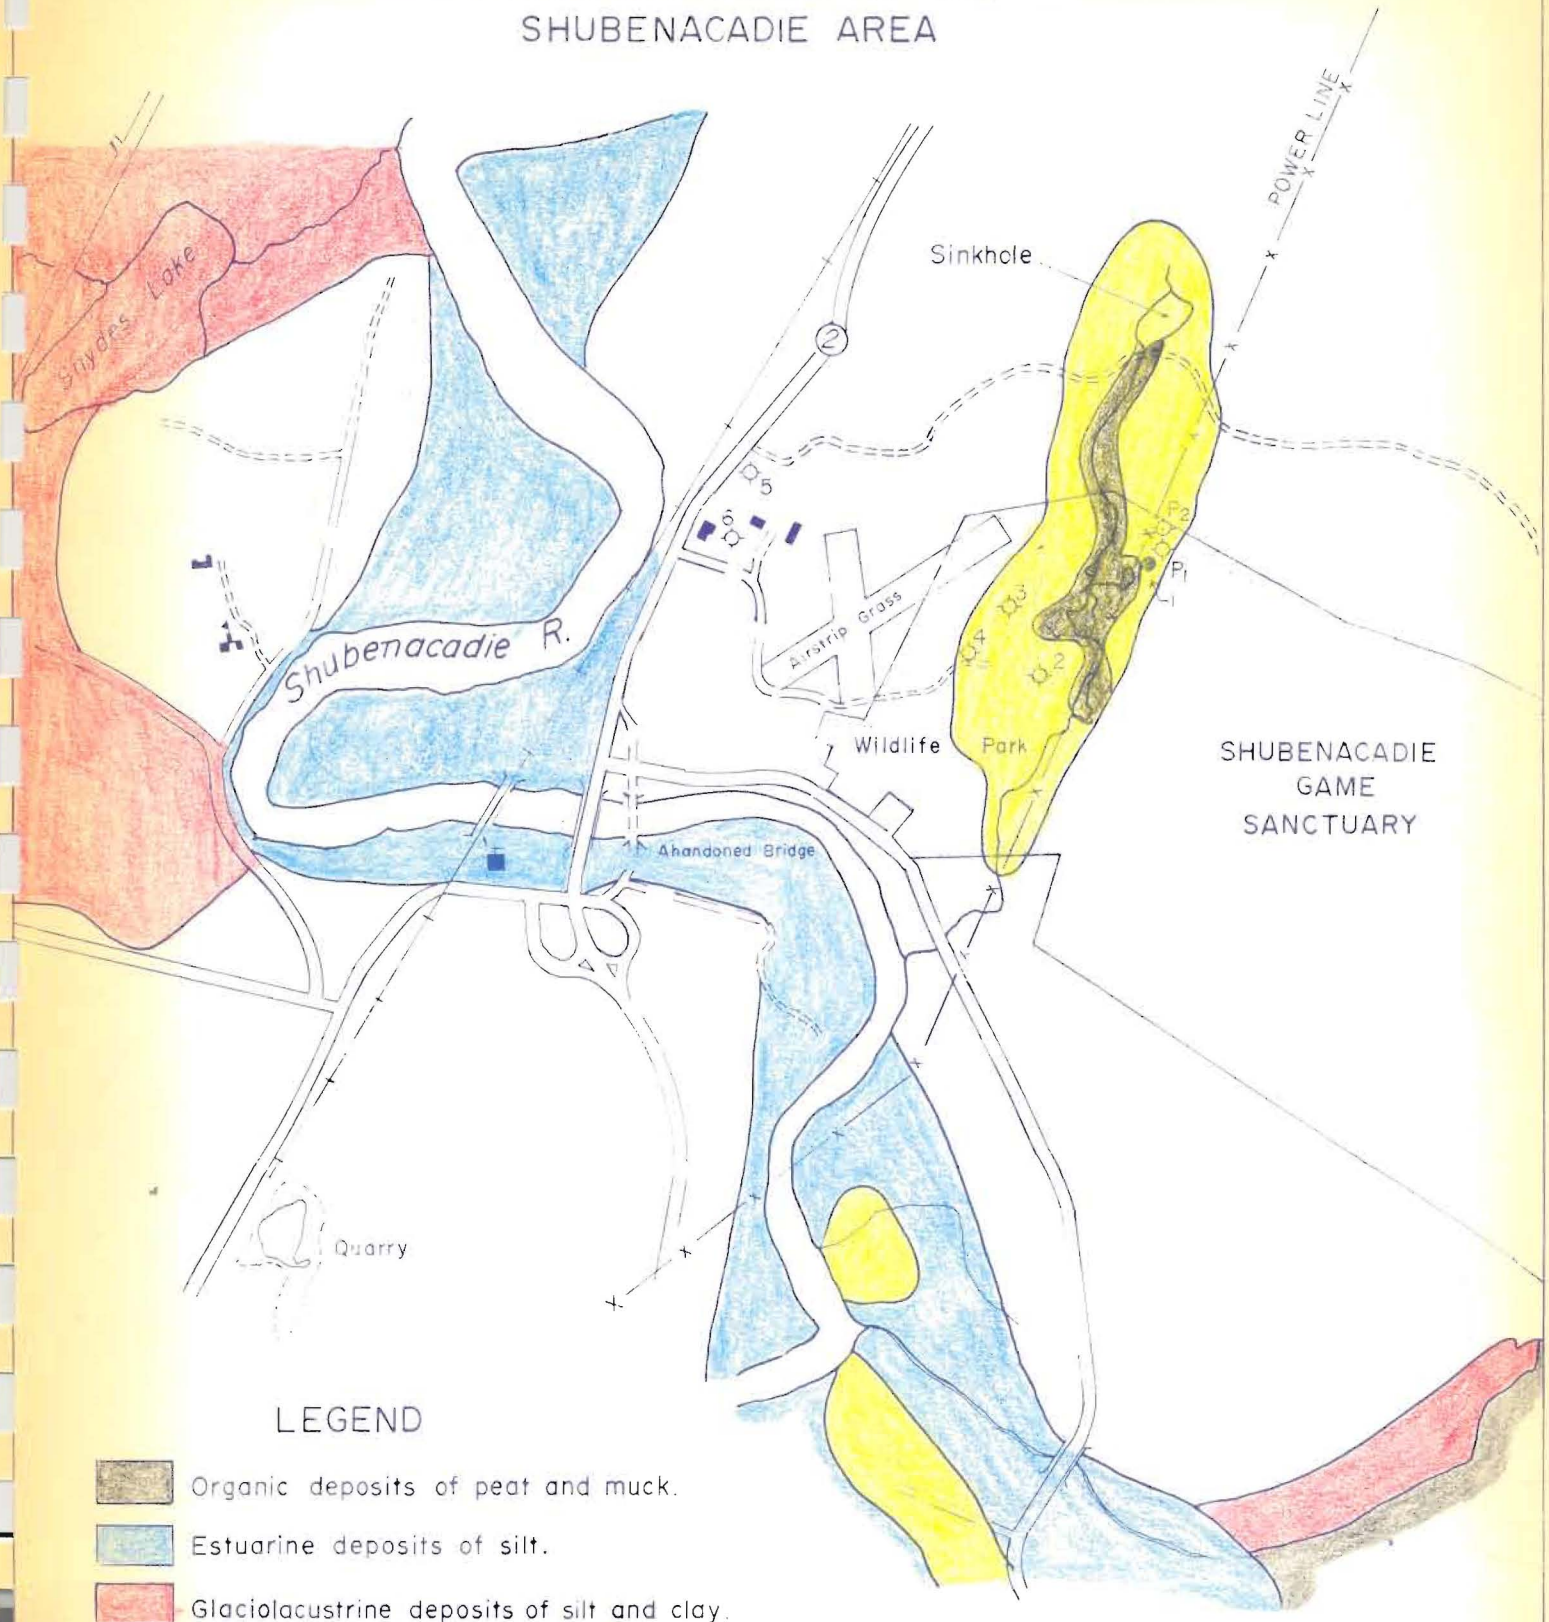
The rocks underlying the Shubenacadie area belong exclusively to the Windsor Group of marine sediments of Mississippian age, and consist of limestone, gypsum, shale and some minor amounts of sandstone.

Surficial deposits of till, sand, silt and clay of varying thickness are found in the area overlying the bedrock. These deposits being generally thinner on the uplands and thickest in the lowlands.






Bedrock Deposits

Lack of outcrop in the map area makes it difficult to learn the structure of the Windsor marine sediments. However all drill holes, wells, etc. that have penetrated the surficial materials indicated the bedrock as limestones, gypsum, calcareous shales, and minor amounts of sandstones. Three drilled wells in the wild life park bottomed in these types of rocks have variable yields (see Fig. 2 for Location and Appendix A for logs).

SURFICIAL GEOLOGY OF THE SHUBENACADIE AREA



LEGEND

-  Organic deposits of peat and muck.
-  Estuarine deposits of silt.
-  Glaciolacustrine deposits of silt and clay.
-  Glaciofluvial deposits of sand
-  Basal till.

Scale : 1" = 1320'

Surficial Deposits

Mantling the bedrock are deposits of glacial drift. Glacial drift includes unsorted till (unstratified drift) deposited during the Pleistocene Epoch (ice age), and washed materials consisting of glaciofluvial and/or lacustrine materials deposited by glacial melt water. Till is composed of a mixture of clay, silt and gravel or a combination of any of these found generally anywhere but along river flood plains. Lacustrine deposits of fine sand and silt usually occur in lowland areas and may be incised by recent stream action and replaced by coarser alluvial materials consisting of sands and gravels.

The surficial materials found in this area were probably deposited while the remains of the glacier still occupied the uplands lying to the east, referred to as Wittenburg Mountain. The most common material in the area is a basal clay till. However the river flood plains and the adjacent lowland areas are covered with stratified deposits of glaciofluvial and/or lacustrine silts and sands. Within the park these silts and sands are confined to the borders of the small drainage system flowing through the sanctuary. Test holes drilled into these materials indicate that the depth varies from about 10-15 feet. A gray plastic clay underlying the sand extends to a depth of over 100 feet.

Although these sands generally possess very good sorting they are interbedded with deposits of peat in most areas. The occurrence of peat was consistent at all locations where it was found in that it occurs at a depth of from 2 to 3 feet and also immediately overlying the clay. At some locations it also occurred at a depth of about 6-7 feet.

The only location where no peat was found interbedded with or immediately underlying the sand was at well point No. 2 (see P2 on Fig. 2).

HYDROLOGY

Introduction

The shales and till seldom yield more than a domestic water supply in one well. Limestone and gypsum deposits are sometimes capable of yielding large amounts of groundwater but only with usually undesirable chemical characteristics. The waters are very hard and contain high amounts of total dissolved solids. However because of the intended use in this area and the other supply factors, a very hard water may be perfectly acceptable if the supply is more than adequate.

The only geological deposits in the area that may present favorable conditions for obtaining large quantities of relatively good quality water are the surficial materials of glaciofluvial and/or lacustrine sands (see Fig. 2). These are possible aquifers or water bearing zones. In the past, wells have not been drilled into the sand deposits because methods of screening wells in unconsolidated deposits were not known by local drillers until recently.

Windsor Aquifers

The yields of wells drilled into the Windsor sediments are highly variable. Solution channels penetrated by wells in limestone and/or gypsum beds may yield substantial quantities of water whereas wells penetrating the shale units and massive limestone and/or gypsum beds may not yield enough water to meet individual domestic needs. Three deep bedrock wells drilled in the area (Nos. 2, 3, and 4 Table 1) yielded between 4 and 5 igpm when tested by the well drillers.

Surficial Aquifers

In some places Pleistocene sands and gravels are very good aquifers. For

example a screened well completed in a sand and gravel aquifer near Brookfield indicated a yield of over 200 igpm (over 285,000 igpd).

Table 1. Data on Selected Wells Drilled in Shubenacadie

<u>Well No.</u>	<u>Depth (ft.)</u>	<u>Diam. (in.)</u>	<u>Length of Casing</u>	<u>Driller's Estimate of yields (igpm)</u>
2	255	6	121	4
3	350	6	80(?)	5
4	116	6	102	5
5	112	6	112	12
6	142	6	142	40 +

To date there is limited information available on the surficial deposits of sand and gravel in the Shubenacadie area that indicate whether they are good water bearing materials or not, well No. 5 and 6 (Table 1) are bottomed in sand and gravel and are reported capable of yielding up to 12 igpm and 40 + igpm respectively.

Dug well No. 1 (Fig. 2) constructed with a graded sand pack yielded about 5 igpm during 8 hours of continuous pumping during which time the water table appeared to stabilize at a drawdown of about 4 feet.

Two, 1 1/2 inch diameter, No. 20 slot well screens (P1 and P2, Fig. 2) were jetted to a depth of about 11 feet where they encountered a heavy grey clay. P1 penetrated two peat horizons, one at a depth of about 4 feet and the other at the bottom of the sand at a depth of about 10 feet. P2 penetrated about 11 feet of clean, fine sand overlying the clay. This latter well point was subsequently

pumped at about 7 igpm for 2 hours resulting in about 3 feet of drawdown at the point.

WATER QUALITY

Windsor Aquifers

Generally waters from the Windsor rocks are extremely high in hardness, sodium, chloride, sulphates, and iron. Consequently these waters are commonly objectionable as a water supply mainly because of the problems that this type of water created in hot water heating systems and laundry operations. Normally these waters are quite acceptable for other domestic purposes such as drinking and cooking.

The chemical analyses of samples collected from wells No. 2, 3 and 4 are listed in Appendix B. Total dissolved solids of these waters varies from about 876 ppm to about 2,769 ppm. In all cases sulphate is the most common constituent. In the samples from well Nos. 2 and 3 sodium and chloride are also present in above normal amounts.

Surficial Aquifers

Water samples collected from the surficial sand deposits may be divided into two groups: firstly, the samples from wells (i.e. well No. 1) penetrating peat horizons interbedded in the sand; secondly, the sample from well Point No. 2 which penetrated clean sand for a depth of 11 feet when clay was encountered.

The quality of water from the peat-sand formation is undesirable because of two main factors; namely color and high coliform bacteria population (see Appendix A for reports on bacteriological examination of water samples). It was learned after

after constructing well No. 1 that the sand deposit in that area has been used as a burial grounds by the park employees. However no records were kept of the burials and because the sites have not been posted it is impossible to determine a safe location for development of such a well.

The sample of water from well point No. 2 indicated a very good quality, in which all chemical constituents analysed for were present in amounts less than those limits outlined in "Canadian Drinking Water Standards and Objectives 1968".

RECOMMENDATIONS AND CONCLUSIONS

From the existing data on the groundwater geology of the Shubenacadie area it appears that four possible alternatives exist for development of a water supply.

These alternatives listed in order of decreasing priorities are as follows:

1. Development of the glaciofluvial and/or lacustrine sand deposits;
2. Development of the upper gravel formation reported in the log of well No. 6;
3. Utilization of the water obtained from drilled well No. 4;
4. Utilizing the water, with treatment, from the sinkhole about 0.5 mile north of the wild life park.

Before development of the glaciofluvial and/or lacustrine sand deposits they must be fully explored and evaluated with respect to development of a water supply. This procedure must entail: firstly, locating and outlining the area that has been contaminated; secondly, installing a series of small diameter well screens a safe distance from and up gradient of the outlined contaminated area; and thirdly, protecting the area in which the well system is developed from further indiscriminate disposal of potentially dangerous pollutants.

Development of the upper gravel deposits recorded in the log of well No. 6 would entail logging these materials with the purpose of developing a screened well at a depth of about 50 to 60 feet.

Utilization of the water from well No. 4 would involve conducting a pump test on the well and supplying a pump capable of producing the safe yield determined from the pump test data. If the quality is highly objectionable then the only other course of action open is either treatment of this well water or utilization of the sink-hole which would undoubtedly require chlorination.

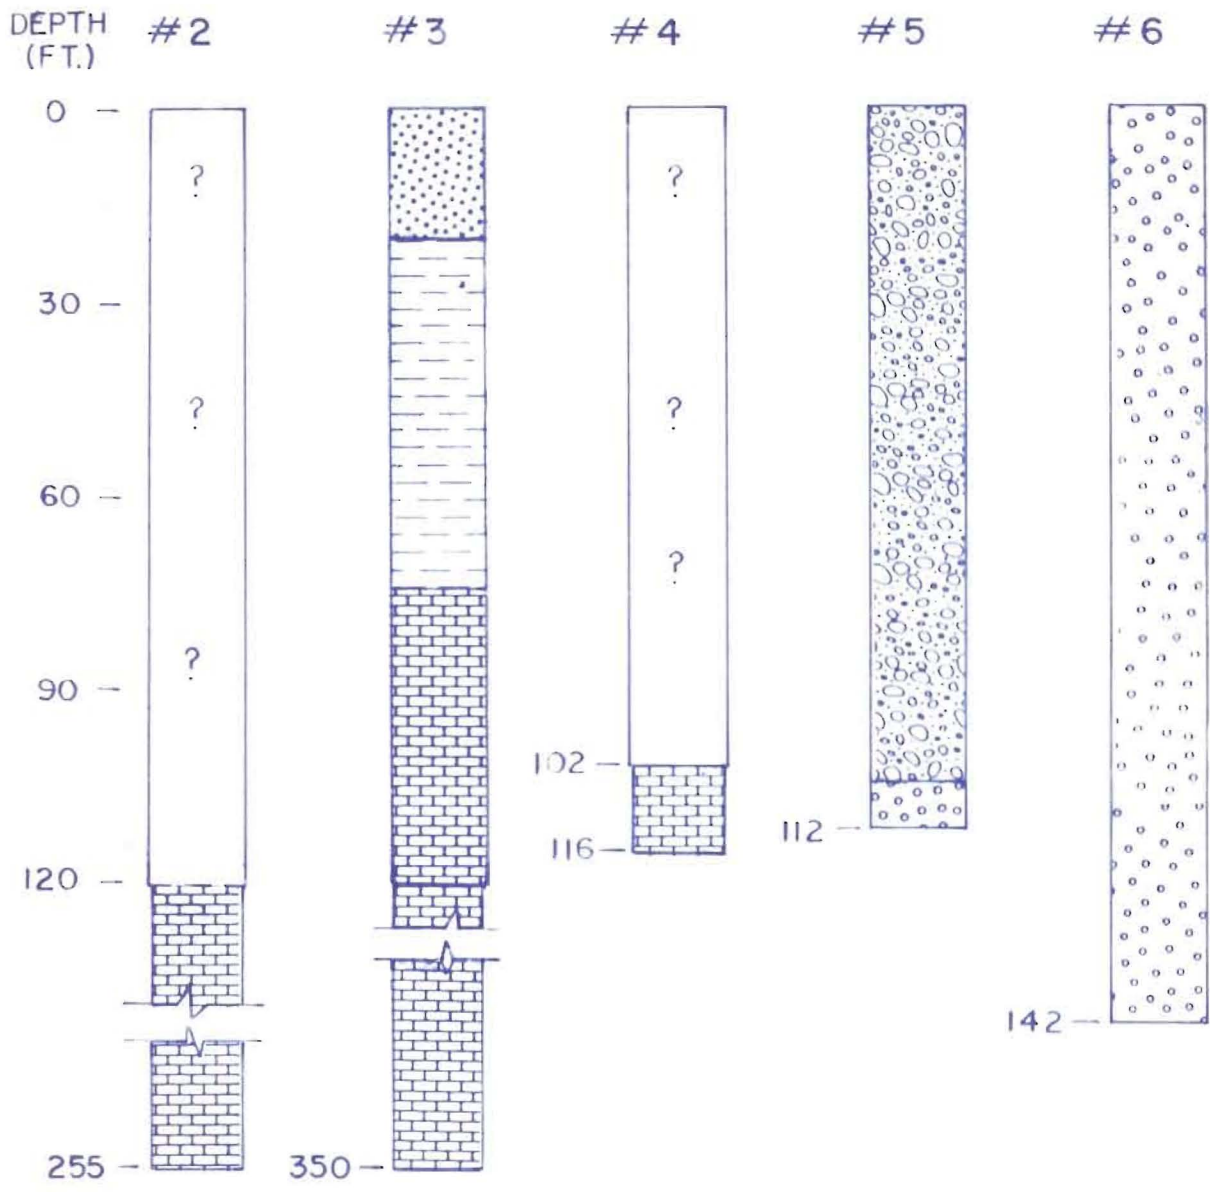
REFERENCES CITED

1. Atlantic Development Board (April 1967): Nova Scotia Water Resources Study, prepared by the Groundwater Section, N. S. Department of Mines.
2. Brandon, L. V. (1963): Groundwater Probability, Truro (west half) Nova Scotia; Geological Survey of Canada, Map 1160 A.
3. Canada Department of National Health and Welfare (1969): Canadian Drinking Water Standards and Objectives 1968, Prepared by The Joint Committee on Drinking Water Standards.
4. Hennigar, T. W. (1968): Groundwater Survey Brookfield Area, Colchester County, Nova Scotia, N. S. Department of Mines, unpublished report.
5. Hennigar, T. W. (1969): Preliminary Report on The Groundwater Survey of the Elmsdale-Lantz Area, Hants County, Nova Scotia, N. S. Dept. of Mines, unpublished report.
6. Hughes, Owen L. (1957): Surficial Geology of Shubenacadie Map-Area, Nova Scotia, Geological Survey of Canada, Paper 56-3.
7. Stevenson, I. M. (1959): Shubenacadie and Kennetcook Map-Area, Colchester, Hants and Halifax Counties, Nova Scotia, Geological Survey of Canada, Memoir 302.






APPENDIX A

Graphic logs of selected wells drilled in the Shubenacadie area.

GRAPHIC LOGS OF SELECTED WELLS DRILLED IN THE SHUBENACADIE AREA



LEGEND

-  Clay
-  Clay & Boulders
-  Gravel
-  Sand
-  Gypsum & Limestone

Vertical Scale 1" = 30'

T.W. HENNIGAR

APPENDIX B

Chemical analyses of samples from selected wells in the Shubenacadie area.

NOVA SCOTIA DEPARTMENT OF MINES
GROUNDWATER SECTION
CHEMICAL ANALYSIS OF WATER

NOV 4 1970

Sample No.: WELL No. 2
 Area: Shubenacadie
 Grid Location: 11E3
 Source: Well (Wildlife Park) Depth 225
 Field Measurements: Temp: 49°F
 Remarks: Length csq 121 (diam. 6')

Date Sampled: October 2, 1970
 Date of Analysis: October 25, 1970
 Sampled By: T. W. Hennigar
 Aquifer: Windsor Group
 pH: _____; Fe: _____

	<u>ppm</u>	<u>epm</u>		
Calcium	67.5		Alkalinities:	
Magnesium	21.6		-Phenolphthalein as CaCO ₃	NIL
Sodium	450.0		-Methyl Orange as CaCO ₃	136.0 ppm
Potassium	4.0		Hardness (Total as CaCO ₃)	150.0 ppm
Iron Total	0.29		Loss of Ignition (1 hr. @ 500°C)	19.2 ppm
Manganese Total	0.008		Total Dissolved Solids	1,924.3 ppm
Sulphate	781.5		Suspended Matter	0.6 ppm
Chloride	342.0		Specific Conductance (mhos. x 10 ⁻⁵ @ 25°C)	0.0200 2000
Fluoride	0.12		pH value	7.3
Nitrate	3.74		Color	5
Silica	11.0		Turbidity	2.7
Boron	0.25		SSP	
Copper	<u>ppb</u> 550		SAR	
Lead	10			
Zinc	50			
Other (specify)				

NOTE: T denotes trace amount (Less than 0.01 ppm)

Analysed by: *M. Gates*

NOVA SCOTIA DEPARTMENT OF MINES
GROUNDWATER SECTION
CHEMICAL ANALYSIS OF WATER

Sample No.: WELL No. 3
 Area: Shubenacadie
 Grid Location: 11E3
 Source: Well (350') Diam. 6" (Wildlife Park)
 Field Measurements: Temp: 57°F
 Remarks: High Solids

Date Sampled: October, 1970 (2)
 Date of Analysis: October 25, 1970
 Sampled By: T. W. Hennigar
 Aquifer: Windsor Group
 pH: _____; Fe: _____

	<u>ppm</u>	<u>eppm</u>		
Calcium	182.2		Alkalinities:	
Magnesium	26.9		-Phenolphthalein as CaCO ₃	NIL
Sodium	490.0		-Methyl Orange as CaCO ₃	110.0 ppm
Potassium	5.9		Hardness (Total as CaCO ₃)	326.0 ppm
Iron Total	0.30		Loss of Ignition (1 hr. @ 500°C)	632.5 ppm
Manganese Total	0.008		Total Dissolved Solids	2,769.2 ppm
Sulphate	1,440.4		Suspended Matter	0.5 ppm
Chloride	108.1		Specific Conductance (mhos. x 10 ⁻⁵ @ 25°C)	0.0225 2250
Fluoride	0.10		pH value	7.2
Nitrate	3.22		Color	10
Silica	11.7		Turbidity	2.7
Boron	0.28		SSP	
	<u>ppb</u>		SAR	
Copper	400			
Lead	20			
Zinc	120			
Other (specify)				

NOTE:

T denotes trace amount (Less than 0.01 ppm)

Analysed by:

T. W. Hennigar

NOVA SCOTIA DEPARTMENT OF MINES
GROUNDWATER SECTION
CHEMICAL ANALYSIS OF WATER

NOV 9 1970

Sample No.: WELL No. 4

Date Sampled: October 2, 1970

Area: Shubenacadie

Date of Analysis: October 25, 1970

Grid Location: 11E3 Windsor Gr.

Sampled By: T. W. Henniger

Source: _____

Aquifer: _____

Field Measurements: Temp: 55°F

pH: _____; Fe: _____

Remarks: Surface Water 600 Wildlife Park, Well 116' csq Length 102 Dia. 6

	<u>ppm</u>	<u>epm</u>		
Calcium	64.1		Alkalinities:	
Magnesium	34.0		-Phenolphthalein as CaCO ₃	NIL
Sodium	76.0		-Methyl Orange as CaCO ₃	104.9 ppm
Potassium	1.2		Hardness (Total as CaCO ₃)	138.1 ppm
Iron Total	0.31		Loss of Ignition (1 hr. @ 500°C)	374.0 ppm
Manganese Total	0.040		Total Dissolved Solids	876.6 ppm
Sulphate	249.8		Suspended Matter	0.060 ppm
Chloride	26.8		Specific Conductance (mhos. x 10 ⁻⁵ @ 25°C)	0.006 600
Fluoride	0.08		pH value	7.7
Nitrate	3.12		Color	5
Silica	7.72		Turbidity	3.7
Boron	0.10		SSP	
Copper	<u>ppb</u> 100		SAR	
Lead	10			
Zinc	40			
Other (specify)				

NOTE:

T denotes trace amount (Less than 0.01 ppm)

Analysed by:

W. Gates

1330

NOVA SCOTIA WATER AUTHORITY

CHEMICAL ANALYSIS OF WATER

NOV 18 1970
NOVA SCOTIA 22

LOCAT: Shubenacadie

DATE SAMPLED: 15/8/70

11 E/3 B 79 0

DATE RECEIVED: 5/10/70

IDENTIFICATION MARK: WRLH NO. 1

SAMPLED BY: T.W. Hennigar

SUBMITTED BY: T.W. Hennigar

N.S.D.M., Box 1087, Halifax, N.S.

	ppm	epm		
Calcium	68.2	3.40	Alkalinities	
Magnesium	2.15	.181	-Phenolphthalein as CaCO ₃	40
Sodium	2.0	.087	-Methyl Orange as CaCO ₃	.32
Iron Total	0.02	.001	Hardness (Total as CaCO ₃)	181.0
Manganese Total			Loss on Ignition (1 hr. @ 500°C)	
Sulphate	11	.229	Total Dissolved Solids	
Chloride	14.2	.400	Suspended Matter	
Nitrate	T		Specific Conductance (mhos. x 10 ⁻⁵)	26
			pH Value	6.4
			Color	10
			Turbidity	10

REMARKS: DEPTH = 11' , DIAM = 3'

TOTAL HARDNESS - DETERMINED BY EDTA TITRATION.
n - T DENOTES TRACE AMOUNT (LESS THAN 0.01 p.p.m).
Te - T DENOTES TRACE AMOUNT (LESS THAN 0.01 p.p.m).
Na - DETERMINED BY FLAME PHOTOMETER.

DATE: November 9, 1970

ANALYSED BY: [Signature]

48378/1

NOVA SCOTIA DEPARTMENT OF MINES
GROUNDWATER SECTION
CHEMICAL ANALYSIS OF WATER

Sample No.: Well Point No. 2

Area: Shubenacadie (Lands and Forests)

Grid Location: 11 E 3 B 79 O

Source: Glaciofluvial sands, Depth = 11'

Field Measurements: Temp: _____

Remarks:

Date Sampled: November 3, 1970

Date of Analysis: November 27, 1970

Sampled By: Terry W. Hennigar

Aquifer: Surficial sands/Windsor Group

pH: _____; Fe: _____

	<u>ppm</u>	<u>epm</u>		
Calcium	2.9		Alkalinities:	
Magnesium	0.6		-Phenolphthalein as CaCO ₃	0.0
Sodium	6.5		-Methyl Orange as CaCO ₃	33.8
Potassium	1.0		Hardness (Total as CaCO ₃)	29.5
Iron Total	0.11		Loss of Ignition (1 hr. @ 500°C)	20.5
Manganese Total	0.05		Total Dissolved Solids	
Sulphate	1.78		Suspended Matter	0.11
Chloride	6.0		Specific Conductance (mhos. x 10 ⁻⁵ @ 25°C)	90
Fluoride			pH value	6.8
Nitrate	3.22		Color	5
Silica	17.35		Turbidity	2.49
Boron	0.75		SSP	
Copper	<u>ppb</u> 450		SAR	
Lead	30			
Zinc	40			
Other (specify)				

NOTE:

T denotes trace amount (Less than 0.01 ppm)

Analysed by:

APPENDIX C

Results of bacteriological examination of water samples
from selected wells in the Shubenacadie area.

BACTERIOLOGICAL EXAM. OF WATER

SAMPLE TAKEN BY T W HENNIGAR

FOR _____ D.H.M.O. TREATED RAW

DATE 15 Sept /70 MUNICIPAL LAKE
 SOURCE OR LOCATION Dept of Lands & Forests Park SPRING SWIMMING AREA
Shubenacadie WELL SWIMMING POOL
WELL No. 1 RIVER BEACH
 OTHER _____

NAME T W HENNIGAR

ADDRESS GROUNDWATER GEOLOGIST
P.O. Box 1087 N.S.
HALIFAX, N.S.

DATE REPORTED SEP 17 1970

LAB. NO. SEP 16 70 72208 | 4 UNITS

REPORT

NUMBER OF COLIFORM MICROORGANISMS PER 100 ML OF SAMPLE 2100

GRADE (FOR UNTREATED WATER ONLY) C

INTERPRETATION

GRADE A. SATISFACTORY, LESS THAN 2 PER 100 ML. OF SAMPLE!
 GRADE B. DOUBTFUL, BETWEEN 2 AND 10 PER 100 ML. OF SAMPLE!
 GRADE C. UNSATISFACTORY, GREATER THAN 10 PER 100 ML. OF SAMPLE!

R. S. Martin DIRECTOR

DIVISION OF LABORATORIES

NOVA SCOTIA DEPT. OF PUBLIC HEALTH

5800 UNIVERSITY AVENUE HALIFAX, N.S.

PLEASE SEE REVERSE SIDE.

BACTERIOLOGICAL EXAM. OF WATER

SAMPLE TAKEN BY T W HENNIGAR

FOR Lands & Forests D.H.M.O. TREATED RAW

DATE 23 Sept /70 MUNICIPAL LAKE
 SOURCE OR LOCATION WELL No. 1 SPRING SWIMMING AREA
Shubenacadie WELL SWIMMING POOL
 RIVER BEACH
 OTHER _____

NAME T. W. HENNIGAR

ADDRESS GEOLOGIST, Dept of Mines
P.O. Box 1087 N.S.
HALIFAX, N.S.

DATE REPORTED Sept 25/70

LAB. NO. SEP 24 70 73043 | 4 UNITS

REPORT

NUMBER OF COLIFORM MICROORGANISMS PER 100 ML OF SAMPLE 200

GRADE (FOR UNTREATED WATER ONLY) C

INTERPRETATION NOVA SCOTIA

GRADE A. SATISFACTORY, LESS THAN 2 PER 100 ML. OF SAMPLE!
 GRADE B. DOUBTFUL, BETWEEN 2 AND 10 PER 100 ML. OF SAMPLE!
 GRADE C. UNSATISFACTORY, GREATER THAN 10 PER 100 ML. OF SAMPLE!

R. S. Martin DIRECTOR

DIVISION OF LABORATORIES

NOVA SCOTIA DEPT. OF PUBLIC HEALTH

5800 UNIVERSITY AVENUE HALIFAX, N.S.

PLEASE SEE REVERSE SIDE.

BACTERIOLOGICAL EXAM. OF WATER

SAMPLE TAKEN BY T W HENNIGAR

FOR Lands & Forests D.H.M.O. TREATED RAW

DATE 24 SEPT /70 MUNICIPAL LAKE
 SOURCE OR LOCATION WELL No. 1 SPRING SWIMMING AREA
SHUBENACADIE WELL SWIMMING POOL
 RIVER BEACH
 OTHER _____

NAME T. W. HENNIGAR

ADDRESS GEOLOGIST
P.O. Box 1087 N.S.
HALIFAX, N.S.

DATE REPORTED Sept 26/70

LAB. NO. SEP 25 70 73166 | 4 UNITS

REPORT

NUMBER OF COLIFORM MICROORGANISMS PER 100 ML OF SAMPLE 18

GRADE (FOR UNTREATED WATER ONLY) _____

INTERPRETATION

GRADE A. SATISFACTORY, LESS THAN 2 PER 100 ML. OF SAMPLE!
 GRADE B. DOUBTFUL, BETWEEN 2 AND 10 PER 100 ML. OF SAMPLE!
 GRADE C. UNSATISFACTORY, GREATER THAN 10 PER 100 ML. OF SAMPLE!

R. S. Martin DIRECTOR

DIVISION OF LABORATORIES

NOVA SCOTIA DEPT. OF PUBLIC HEALTH

5800 UNIVERSITY AVENUE HALIFAX, N.S.

PLEASE SEE REVERSE SIDE.

BACTERIOLOGICAL EXAM. OF WATER

SAMPLE TAKEN BY T. W. HENNIGAR

Nov 270 76115

2 ~~4~~ UNITS

FOR Dept of Lands & Forests D.H.M.O.

TREATED RAW

MUNICIPAL LAKE

SPRING SWIMMING AREA

WELL SWIMMING POOL

RIVER BEACH

OTHER _____

DATE 29 Oct 70
SOURCE OR LOCATION Open Well at Wildlife Park, Shubenacadie

LAB. NO. REPORT

NUMBER OF COLIFORM MICROORGANISMS PER 100 MI OF SAMPLE 90

GRADE (FOR UNTREATED WATER ONLY) C

INTERPRETATION

GRADE A. SATISFACTORY, LESS THAN 2 PER 100 ML. OF SAMPLE

GRADE B. DOUBTFUL, BETWEEN 2 AND 10 PER 100 ML. OF SAMPLE

GRADE C. UNSATISFACTORY, GREATER THAN 10 PER 100 ML. OF SAMPLE

NAME T. W. HENNIGAR

ADDRESS GEOLOGIST, N.S. Dept of Mines P.O. Box 1087, HALIFAX N.S.

A.G. L. S. Martine DIRECTOR

DIVISION OF LABORATORIES

NOVA SCOTIA DEPT. OF PUBLIC HEALTH

5800 UNIVERSITY AVENUE HALIFAX, N.S.

Nov 3
DATE REPORTED

PLEASE SEE REVERSE SIDE.

BACTERIOLOGICAL EXAM. OF WATER

SAMPLE TAKEN BY T. W. HENNIGAR

Nov 471 76344

4 UNITS

FOR N.S. DM D.H.M.O.

TREATED RAW

MUNICIPAL LAKE

SPRING SWIMMING AREA

WELL SWIMMING POOL

RIVER BEACH

OTHER _____

DATE 3 Nov 70
SOURCE OR LOCATION WELL POINT #2 WILDLIFE PARK SHUBENACADIE

LAB. NO. REPORT

NUMBER OF COLIFORM MICROORGANISMS PER 100 MI OF SAMPLE 5

GRADE (FOR UNTREATED WATER ONLY) B

INTERPRETATION

GRADE A. SATISFACTORY, LESS THAN 2 PER 100 ML. OF SAMPLE

GRADE B. DOUBTFUL, BETWEEN 2 AND 10 PER 100 ML. OF SAMPLE

GRADE C. UNSATISFACTORY, GREATER THAN 10 PER 100 ML. OF SAMPLE

NAME T. W. HENNIGAR

ADDRESS GEOLOGIST, P.O. Box 1087 N.S. DEPT OF MINES N.S. HALIFAX N.S.

L. S. Martine DIRECTOR

DIVISION OF LABORATORIES

NOVA SCOTIA DEPT. OF PUBLIC HEALTH

5800 UNIVERSITY AVENUE HALIFAX, N.S.

Nov 5
DATE REPORTED

PLEASE SEE REVERSE SIDE.

KAD