



FENCE DETAILS


SEE FOOTING DETAILS

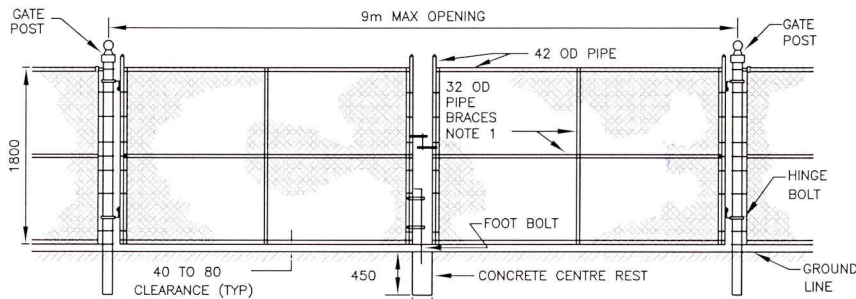


DOUBLE GATE

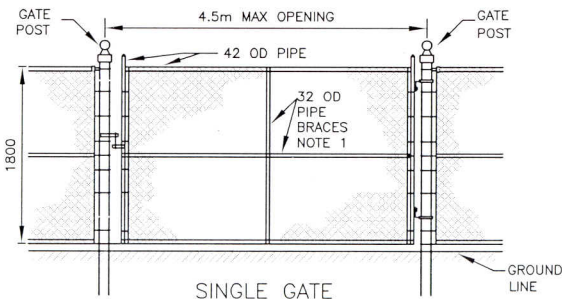

SINGLE GATE

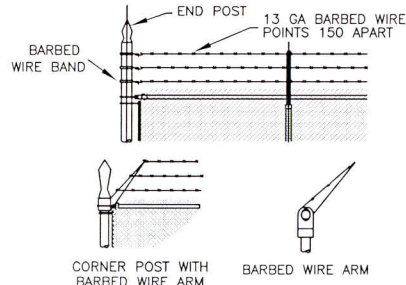


BARBED WIRE FOR CHAIN LINK FENCES

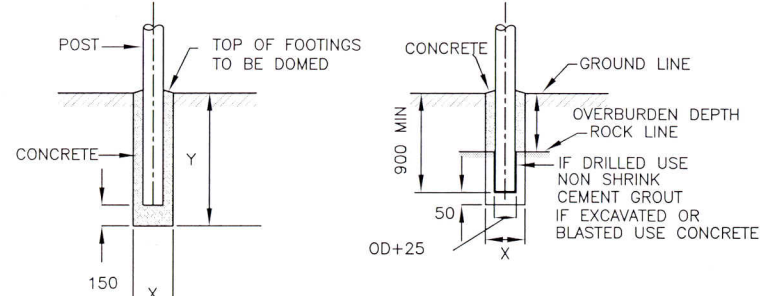

A: IN EARTH

B: IN SHALE, LOOSE OR FRIABLE ROCK OR SOLID ROCK WHERE OVERBURDEN > 600

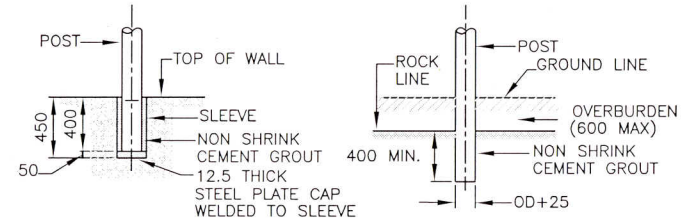

C: ON RETAINING WALL

D: IN SOLID ROCK (OVERBURDEN < 600)

FOOTING DETAILS

DESCRIPTION	OD (mm)	LENGTH <sup>2</sup>		DIM	
		STANDARD (m)	RETAINING WALLS (m)	X (mm)	Y (mm)
		LINE	60	2.7	2.0
END, CORNER, STRAINING AND GATE (5.5m MAX OPENING)	89	3.2	2.3	350	1400
GATES (10m MAX OPENING)	114	3.3	-	450	1500

- NOTES:
- GATE LEAVES  $\leq 1.8\text{m}$  WIDE REQUIRE HORIZONTAL BRACE ONLY, GATE LEAVES  $> 1.8\text{m}$  WIDE REQUIRE BOTH HORIZONTAL AND VERTICAL BRACES.
  - FOR FABRIC WIDTHS  $> 1.8\text{m}$  THE POST LENGTH SHALL BE INCREASED BY THE AMOUNT OF THE DIFFERENCE.
  - ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE NOTED.

*Philip Coburn*  
 Manager Highway Planning and Design

*[Signature]*  
 Director Highway Engineering Services

*[Signature]*  
 Executive Director Highway Engineering and Construction

No.	REVISION
1	HS # ADDED TO TITLE